

**ALT2210T INGROUND LED UPLIGHT**

ALT2210T is a high quality inground uplight luminaire which is designed for commercial and residential lighting projects. The fitting features a 316 marine grade stainless steel construction with tempered glass lens. It also incorporates a unique tilt internal body, allowing the illumination to be focused and adjusted as required.

**ELECTRICAL PARAMETERS**

Input Voltage:	110-240VAC
Power Consumption:	10W / 15W / 20W
LED Driver Classification:	Integral, Constant Current
Light Source Classification:	Citizen COB

**MECHANICAL SPECIFICATIONS**

Minimum IK Rating:	IK09
IP Protection Rating:	IP67
Nominal Dimensions:	155x185mm
Construction Material:	316 Stainless Steel Trim
Overall Depth inc Housing:	182mm
Recommended Ambient Temp:	-10 ~ +55°C

**CONFIGURATION OPTIONS**

- Low Glare Baffle Louvre Accessory Available
- PVC Plastic Mounting Housing Included
- DALI dimmable LED driver available by request

**PHOTOMETRIC INFORMATION**

Typical Lumen Efficacy:	85lm/W
CCT Colour Temperature:	3000K / 4000K / 5000K
Colour Rendering (Ra):	>85Ra
Beam Angle/Viewing Angle:	10° / 30°

**CONTROL OPTIONS**


This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

**COMPLIANCE & CERTIFICATION**

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	<b>ALT2210T</b>
Specify LED CCT:	<b>3000K / 4000K / 5000K</b>
Specify Beam Angle:	<b>10° / 30°</b>
Mounting Housing:	<b>PVC Mounting Housing Included</b>
Optional Accessory:	<b>Low Glare Baffle Available</b>
Dimming Option:	<b>Non Dimmable / DALI / 1-10V</b>
Input Voltage:	<b>100-240VAC / 12VDC / 24VDC</b>

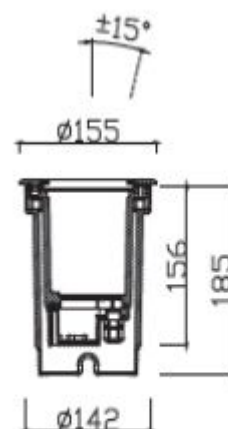

All product details are subject to change without notice. Final specifications may vary.