

ALT7056 IP65 LED WALL LIGHT


Altitude ALT7056 is a commercial grade light luminaire with unique adjustable swivel body. ALT7056 is manufactured from high quality components and premium LED light source. The fitting is ideal for commercial applications such as government departments, education projects, retail spaces, hospitality, commercial landscaping projects.

ELECTRICAL PARAMETERS

Input Voltage:	100-240VAC
Power Consumption:	30W
LED Driver Classification:	Integral Meanwell LED Driver
Light Source Classification:	Citizen COB LED

MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK09
IP Protection Rating:	IP65
Nominal Dimensions:	230x197x172mm
Construction Material:	Tempered Glass
Standard Colour/Finish:	Dark Charcoal
Recommended Ambient Temp:	-10 ~ +55°C

**CONFIGURATION OPTIONS**

- Non standard fitting colours available by special request
- Integral DALI dimmable configuration avail by special request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	90lm/w
CCT Colour Temperature:	3000K / 4000K / 6000K
Colour Rendering (Ra):	>85Ra
Beam Angle/Viewing Angle:	18° / 60°

**CONTROL OPTIONS**


This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Integrated Sensor options, Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

**COMPLIANCE & CERTIFICATION**

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	ALT7056
Specify LED CCT:	3000K / 4000K / 6000K
Specify Beam Angle:	18° / 60°
Specify Finish/Colour:	Dark Charcoal, Powdercoated
Input Voltage Option:	100-240VAC / 24VDC
Dimming Option:	Non Dimmable / DALI / 1-10V / Phase

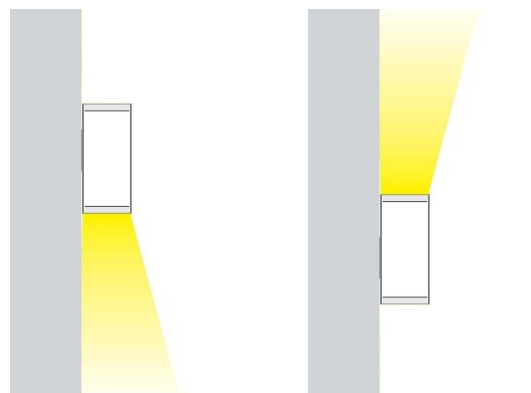

All product details are subject to change without notice. Final specifications may vary.