

ALT7058 IP65 EXTERIOR WALL MOUNTED LUMINAIRE

ALT7058 is a commercial-grade wall luminaire featuring a unique adjustable swivel body. Built with high-quality components and a premium LED light source, the ALT7058 is ideal for a wide range of commercial applications, including government buildings, educational institutions, retail environments, hospitality spaces, and commercial landscaping projects.

ELECTRICAL PARAMETERS

Input Voltage:	100-240VAC
Power Consumption:	30W
LED Driver Classification:	Integral Meanwell LED Driver
Light Source Classification:	Citizen COB LED

MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK09
IP Protection Rating:	IP65
Nominal Dimensions:	330x230x97mm
Construction Material:	Tempered Glass
Standard Colour/Finish:	Dark Charcoal
Recommended Ambient Temp:	-10 ~ +55°C

CONFIGURATION OPTIONS


- Optional anti-glare baffle louver accessory by request
- Non standard fitting colours available by special request
- Integral DALI dimmable configuration avail by special request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	90lm/W
CCT Colour Temperature:	3000K / 4000K / 6000K
Colour Rendering (Ra):	>85Ra
Beam Angle/Viewing Angle:	15° / 50°



CASAMBI



CONTROL OPTIONS

This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Integrated Sensor options, Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.


COMPLIANCE & CERTIFICATION

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70



ORDERING INFORMATION

Model Number:	ALT7058
Specify LED CCT:	3000K / 4000K / 6000K
Specify Beam Angle:	15° / 50°
Specify Finish/Colour:	Dark Charcoal, Powdercoated
Input Voltage Option:	100-240VAC / 24VDC
Dimming Option:	Non Dimmable / DALI / 1-10V / Phase

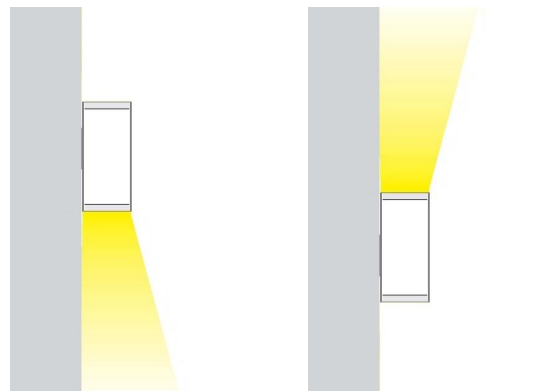

All product details are subject to change without notice. Final specifications may vary.



toll-free: 1300 295 367



email: mail@industrialight.com.au

sales reps:



mobile: 0488 839 917



mobile: 0488 844 503