

CP235 SURFACE MOUNT WALL OR CEILING LUMINAIRE

CP235 is a high-performance, toughened industrial-grade LED ceiling luminaire designed for efficient general area lighting. Its slimline design features a robust powder-coated steel body with a durable polycarbonate lens. Equipped with an integrated LED light source and driver, the CP235 is ideal for workspaces, cool rooms, canopy lighting, and various commercial and industrial applications.

ELECTRICAL PARAMETERS

Input Voltage:	100-265VAC
Power Consumption:	18W
LED Driver Classification:	Integral Constant Current
Light Source Classification:	Epistar SMD LED

**MECHANICAL SPECIFICATIONS**

Minimum IK Rating:	IK10
IP Protection Rating:	IP65
Nominal Dimensions:	235x235x73mm
Construction Material:	Aluminium + Polycarbonate
Standard Colour/Finish:	Powdercoated
Recommended Ambient Temp:	-40°C - 50°C

**CONFIGURATION OPTIONS**

- Non standard colours available by special request
- Integral microwave sensor by request
- DALI dimmable driver by special request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	110lm/W
CCT Colour Temperature:	3000K / 4000K / 5000K / 5700K
Colour Rendering (Ra):	>85Ra
Beam Angle/Viewing Angle:	120°

**CONFIGURATION OPTIONS**


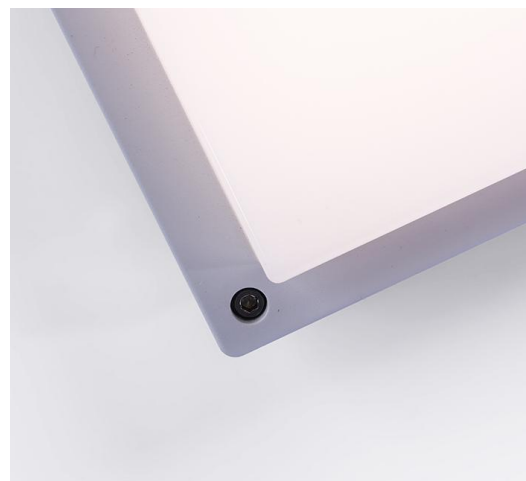
This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

COMPLIANCE & CERTIFICATION**CASAMBI**

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	CP235
Specify LED CCT:	3000K / 4000K / 5000K / 5700K
Input Voltage:	100-277VAC / 24VDC
Specify Finish/Colour:	Black / White
Specify Wattage:	18W
Dimming Options:	Non Dim / DALI / 1-10V / Wireless

**235 x 235mm****73mm**

All product details are subject to change without notice. Final specifications may vary.

toll-free: **1300 295 367**email: **mail@industrialight.com.au**

sales reps:

mobile: **0488 839 917**mobile: **0488 844 503**