

CP405R RECESSED LED CANOPY LUMINAIRE


CP40R is a recessed, industrial-grade ceiling luminaire designed for general area lighting in commercial and industrial applications. Featuring an architecturally styled, powder-coated steel body with a durable polycarbonate lens, it delivers powerful & efficient illumination through its modular LED light source and integrated LED driver. Multiple optical configurations are available.

ELECTRICAL PARAMETERS

Input Voltage:	90-277VAC
Power Consumption:	80W / 100W / 150W / 200W
LED Driver Classification:	Integral Constant Current
Light Source Classification:	CREE XBD

**MECHANICAL SPECIFICATIONS**

Minimum IK Rating:	IK09
IP Protection Rating:	IP65
Nominal Dimensions:	400x400x79.1mm
Construction Material:	Aluminium Alloy with PC & Glass
Standard Colour/Finish:	Powdercoated White
Net Weight:	5.3KG
Recommended Ambient Temp:	-15°C - 50°C

**CONFIGURATION OPTIONS**

- Surface mounted version also available
- Non standard colours available by special request
- DALI-2 LED driver available by request

**PHOTOMETRIC INFORMATION**

Typical Lumen Efficacy:	145lm/w
CCT Colour Temperature:	3000K / 4000K / 6500K
Colour Rendering (Ra):	>80Ra
Beam Angle/Viewing Angle:	Refer to ordering Information

CONFIGURATION OPTIONS



This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

COMPLIANCE & CERTIFICATION






- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	CP405R (Recessed)
Specify LED CCT:	3000K / 4000K / 6500K
Specify Beam Angle:	30° / 60° / 90° / 40°x110° / 90°x60° / 120
Specify Wattage:	80W / 100W / 150W / 200W
Input Voltage Option:	90-265VAC / 24VDC
Dimming Options:	Non Dimmable / DALI / 1-10V / Wireless

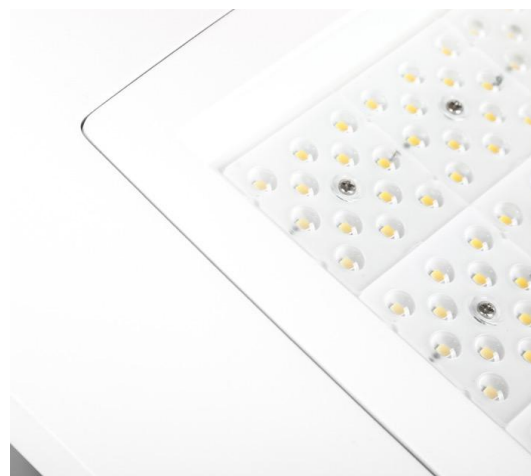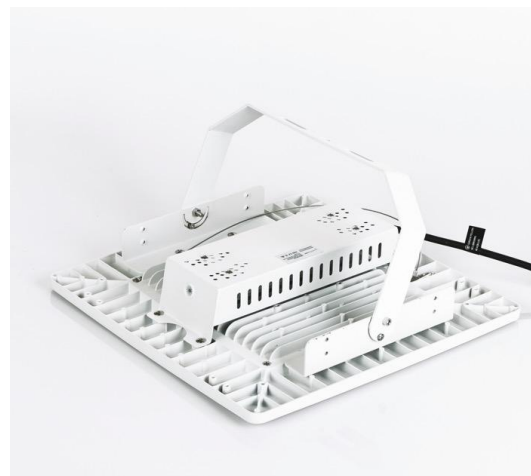

All product details are subject to change without notice. Final specifications may vary.

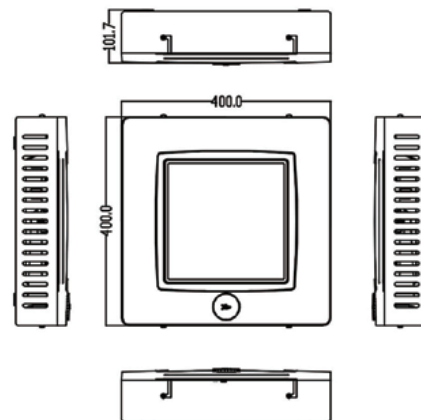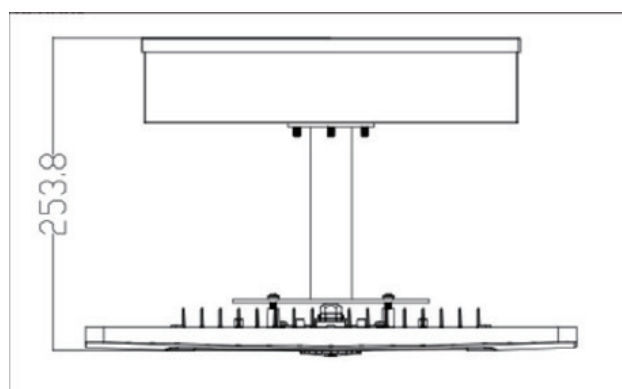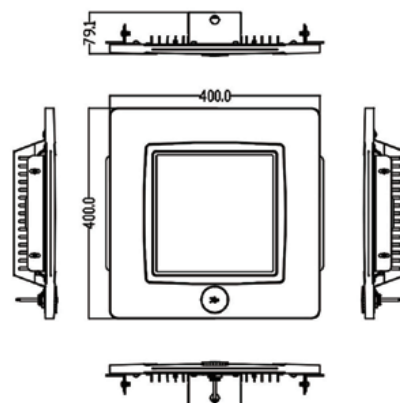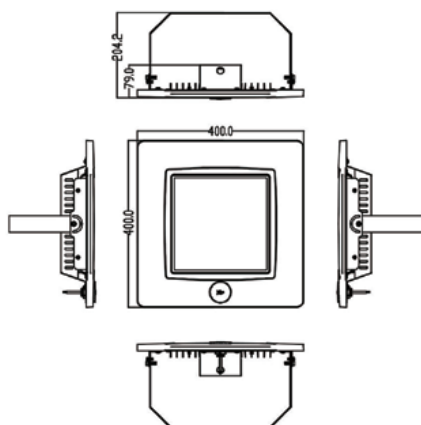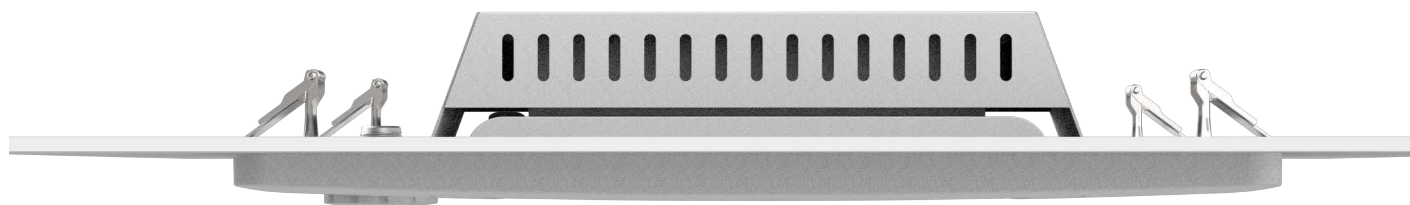

OPTIONAL SUPPORT BRACKET MOUNTING

