

CWL502 IP65 LED WALL LIGHT - NATURAL AGED BRONZE

CWL502 is an outdoor LED wall luminaire designed to deliver elegant up and down illumination with an aged natural finish. Featuring high-performance LED components, it provides energy-efficient architectural lighting for exterior applications. The fitting is manufactured from durable extruded aluminium and finished with a corrosion-resistant powder coating for long-term outdoor performance. CWL502 is ideal for residential and commercial projects seeking premium outdoor LED lighting with a refined, timeless aesthetic.

ELECTRICAL PARAMETERS

Input Voltage:	100-240VAC	 DIMMING OPTIONAL
Power Consumption:	8W	
LED Driver Classification:	Integral Constant Current	
Light Source Classification:	CRAA CXA COB LED	

MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK09
IP Protection Rating:	IP65
Overall Height:	280mm
Body Diameter:	65mm
Overall Projection From Wall:	98mm
Construction Material:	Aluminium with Glass Lens
Standard Colour/Finish:	Natural Aged Bronze
Recommended Ambient Temp:	-15°C - 55°C

**CONFIGURATION OPTIONS**

- Non standard colours available by special request
- Remote mounted DALI dimmable LED driver available

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	110lm/W
CCT Colour Temperature:	3000K / 4000K / 6000K
Colour Rendering (Ra):	>85Ra
Beam Angle/Viewing Angle:	2x10° / 2x30° / 2x55°

CONTROL OPTIONS




This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

COMPLIANCE & CERTIFICATION**CASAMBI**

IESNA2002
AS/NZS60598, LM79, LM80
Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	CWL502
Specify LED CCT:	3000K / 4000K / 6000K
Specify Beam Angle:	2x10° / 2x30° / 2x55°
Specify Finish/Colour:	Natural Aged Bronze / Other
Input Voltage Option:	100-240VAC / 24VDC / 12VDC
Control Option:	Non-Dimmable / DALI / Phase Dim

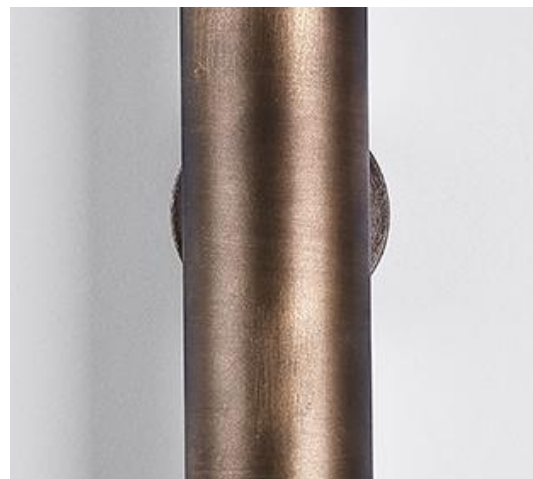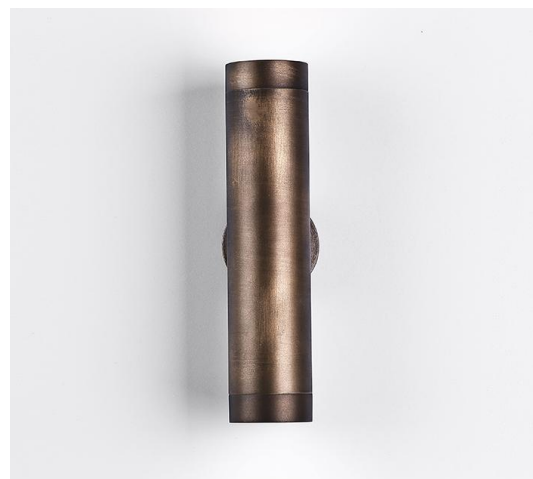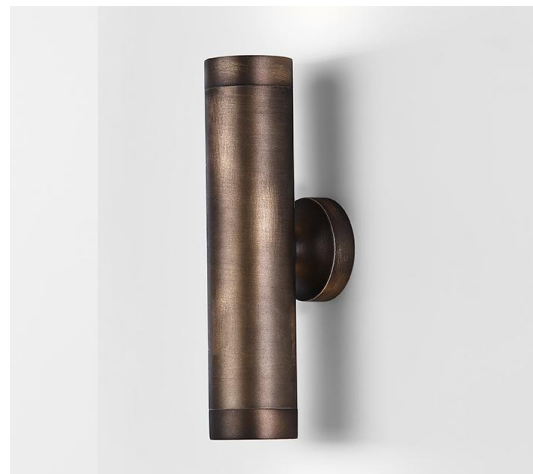

All product details are subject to change without notice. Final specifications may vary.

toll-free: **1300 295 367**email: mail@industrialight.com.au

sales reps:

mobile: **0488 839 917**mobile: **0488 844 503**