

DL6618 ADJUSTABLE COMMERCIAL LED DOWNLIGHT

DL6618 series is a commercial style LED downlight series that can be used for high end interior projects. Incorporating high performance COB LED modules and are available in a wide range of beam angle options and other configuration options. Used in commercial spaces, galleries, museums, hospitality, offices, etc.

ELECTRICAL PARAMETERS

Input Voltage:	220-240VAC
Power Consumption:	18W / 25W / 35W
LED Driver Classification:	Constant Current
Light Source Classification:	CREE® COB LED

MECHANICAL SPECIFICATIONS

Body Configuration	Adjustable Gimbal + 270 deg Swivel
IP Protection Rating:	IP20
Nominal Dimensions:	205mm / Cutout: 190mm
Construction Material:	Aluminium
Standard Colour/Finish:	White Trim
Recommended Ambient Temp:	-10°C - 55°C

CONFIGURATION OPTIONS

- Non standard trim colours available by special request
- DALI dimmable LED driver available by request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	130lm/W
CCT Colour Temperature:	3000K/4000K/6500K
Colour Rendering (Ra):	>80Ra
Beam Angle/Viewing Angle:	Various

**CONFIGURATION OPTIONS**


This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

**COMPLIANCE & CERTIFICATION**

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	DL6618 - Gimbal & Swivel Adjustable
Specify LED CCT:	3000K/4000K/6500K
Specify Beam Angle:	24° / 40° / 60
Specify Finish/Colour:	White / Black / Silver
Specify LED Wattage:	14W / 18W / 24W / 35W
Specify LED Driver:	Phase Dimmable / DALI / DSI / Casambi

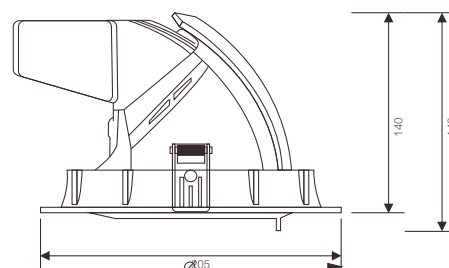

All product details are subject to change without notice. Final specifications may vary.