

FRP20 FRAMELESS LED PANEL

FRP20 is a frameless LED panel that delivers smooth and discrete illumination for features, backlighting, ceiling lighting and other special lighting projects. Industrialight can provide custom sizes and configurations including RGB and other controllable options.

ELECTRICAL PARAMETERS

Input Voltage:	100-240VAC
Power Consumption:	18-48W
LED Driver Classification:	Constant Current
Light Source Classification:	SMD4014



MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK10
IP Protection Rating:	IP54
Overall Thickness:	12mm
Construction Material:	Flameproof Acrylic
Size/Dimensions:	Various from 200-1200mm
Recommended Ambient Temp:	-20°C - 45°C



CONFIGURATION OPTIONS

- Custom shapes and size configurations available by request
- DALI dimmable LED driver available by request
- RGB/RGBW option available by request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	110lm/W
CCT Colour Temperature:	3000K / 4000K / 6500K
Colour Rendering (Ra):	>85Ra
Beam Angle/Viewing Angle:	120°



CONTROL OPTIONS

This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.






CASAMBI

COMPLIANCE & CERTIFICATION

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

ORDERING INFORMATION

Model Number:	FRP20
Specify LED CCT:	3000K / 4000K / 6500K / RGB
Specify Panel Size:	200-1200mm
Mounting Accessory:	Mounting Bracket Kit / Wire Suspension Kit
Input Voltage Option:	100-240VAC / 24VDC
Dimming Option:	Non Dimmable / DALI / Casambi

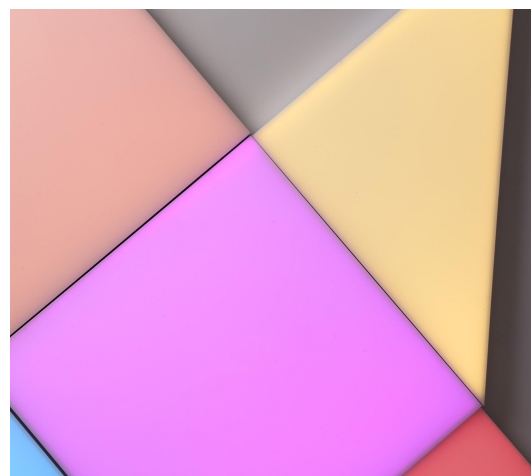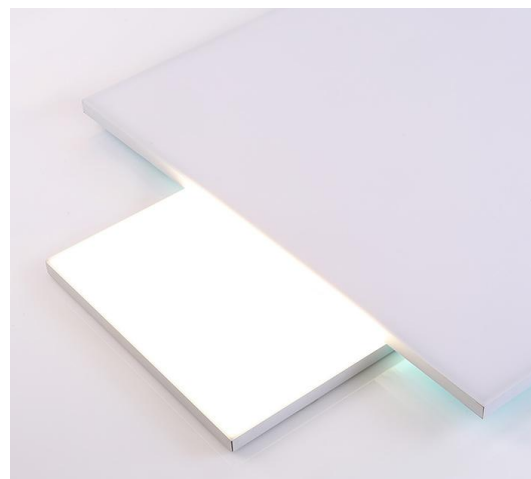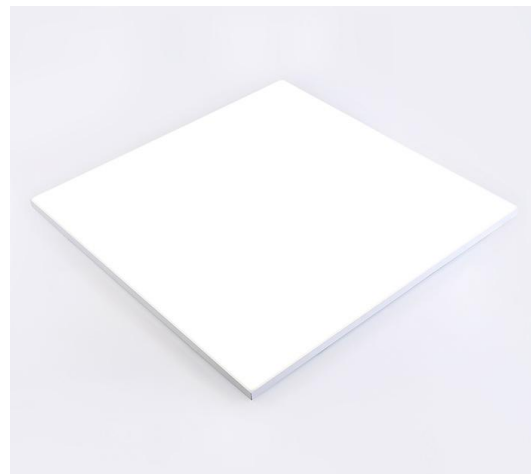

All product details are subject to change without notice. Final specifications may vary.



toll-free: 1300 295 367



email: mail@industrialight.com.au

sales reps:



mobile: 0488 839 917



mobile: 0488 844 503