

KLS500 SURFACE MOUNT LED WALL LIGHT


KLS500 is an exterior wall mounted fitting with integral LED driver and SMD LED light source. The fitting is entirely surface mounted making it ideal for installation onto solid walls such as concrete or masonry. KLS500 is ideal for pathways and steplighting and can be fitted with an integral PIR sensor for a simple automation solution.

ELECTRICAL PARAMETERS

Input Voltage:	220-240VAC
Power Consumption:	6W
LED Driver Classification:	Integral
Light Source Classification:	Epistar SMD LED

**MECHANICAL SPECIFICATIONS**

Mounting:	Surface Mounted
IP Protection Rating:	IP54
Nominal Dimensions:	150(dia)x34mm(depth)
Construction Material:	Aluminium
Standard Colour/Finish:	Dark Grey
Recommended Ambient Temp:	-10°C - 40°C

**CONFIGURATION OPTIONS**

- Non standard colours available by special request
- Optional 24VDC constant voltage version by request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	85lm/W
CCT Colour Temperature:	3000K / 4000K / 6500K
Colour Rendering (Ra):	>80Ra
Beam Angle/Viewing Angle:	120°

**CONFIGURATION OPTIONS**


This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

COMPLIANCE & CERTIFICATION

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	KLS500
Specify LED CCT:	3000K / 4000K / 6500K
Specify Finish/Colour:	Dark Grey / Black / White
Input Voltage Option:	220-240VAC / 24VDC
Dimming Protocol:	Non Dimmable / DALI / Phase / Casambi
IP Rating:	IP54

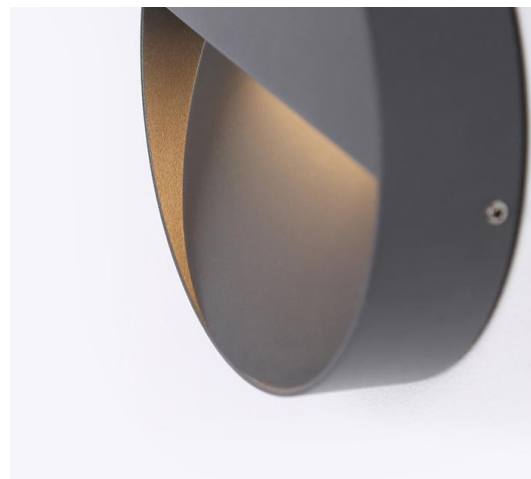

All product details are subject to change without notice. Final specifications may vary.