

**RV3126 DECOR® 26W ARCHITECTURAL LED DOWNLIGHT**

Decor® LED downlights offer superior lumen performance suitable for residential and commercial projects. The luminaires feature high performance LED components are supplied with constant current LED driver. Decor® 26W LED downlights have an opaque frosted lens which delivers maximum uniformity.

**ELECTRICAL PARAMETERS**

Input Voltage:	100-240VAC
Power Consumption:	26W
LED Driver Classification:	Remote, Constant Current
Light Source Classification:	Sharp® High Power-LED

**MECHANICAL SPECIFICATIONS**

Body Configuration:	Tilt/Adjustable
IP Protection Rating:	IP44
Trim Diameter:	150mm
Ceiling Cutout:	140mm
Standard Colour/Finish:	White / Black
Recommended Ambient Temp:	15°C - 45°C

**CONFIGURATION OPTIONS**

- Standard dimmable LED driver included
- DALI dimmable driver available by special request
- Custom trim colours available by special request

**PHOTOMETRIC INFORMATION**

Typical Lumen Efficacy:	95lm/W
CCT Colour Temperature:	3000K/4000K/6500K
Colour Rendering (Ra):	>90Ra
Beam Angle/Viewing Angle:	60°

**CONTROL OPTIONS**


This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

**CASAMBI****COMPLIANCE & CERTIFICATION**

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	<b>RV3126</b>
Specify LED CCT:	<b>3000K/4000K/6500K</b>
Specify Beam Angle:	<b>60°</b>
Specify Finish/Colour:	<b>White</b>
Dimmable LED Driver:	<b>Included</b>
Control Option:	<b>Phase Dimmable / DALI / Casambi / DMX</b>

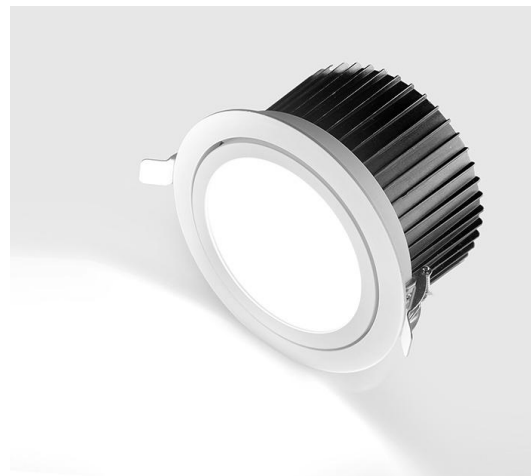

All product details are subject to change without notice. Final specifications may vary.



toll-free: 1300 295 367

email: [mail@industrialight.com.au](mailto:mail@industrialight.com.au)

sales reps:



mobile: 0488 839 917



mobile: 0488 844 503