

VBR2 POLYCARBONATE LINEAR LED LUMINAIRE

VBR is a dual-diffused low profile LED LUMINAIRE that is constructed from fire-resistant polycarbonate body and diffuser. VBR luminaires are available in several different size configurations and are ideal for installation into modern commercial environments including offices, storerooms, workshops, schools, retail showrooms etc.

ELECTRICAL PARAMETERS

Input Voltage:	100-240VAC
Power Consumption:	20W/24W/30W/40W/48W
LED Driver Classification:	Integral, Constant Current
Light Source Classification:	Industrialight SMD2835 LED

MECHANICAL SPECIFICATIONS

Dimensions:	1226x120x40mm
IP Protection Rating:	IP20
IK Rating:	IK10
Construction Material:	Fire Resistant Polycarbonate
Standard Colour/Finish:	White or Black Powdercoated
Recommended Ambient Temp:	15°C - 45°C

**CONFIGURATION OPTIONS**

- Body profile can be customised by special request
- 24VDC version available by special request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	130lm/W
CCT Colour Temperature:	3000K/4000K/5000K/6500K
Colour Rendering (Ra):	>90Ra
Beam Angle/Viewing Angle:	120°

TYPICAL APPLICATIONS



Retail and commercial spaces, educational facilities, aged care, common areas, foyers and garaging. carparks, Industrial spaces, open plan office lighting, concrete slab installation. VBR2 can be fitted with detection sensor, dimming control gear and body colour can be customised.

COMPLIANCE & CERTIFICATION

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	VBR2
Specify LED CCT:	3000K/4000K/5000K/6500K
Length:	1226mm
Body Colour:	White / Black Powdercoated
Specify Wattage:	22W / 30W / 39W / 54W
Input Voltage Option:	100-240VAC / 24VDC
Control Option:	Non Dimmable / DALI / Casambi / 1-10V

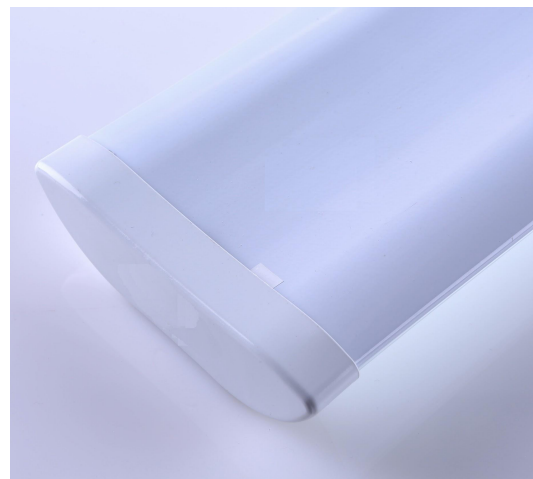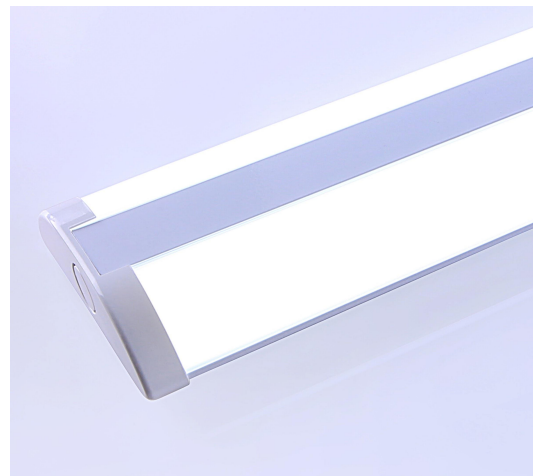

All product details are subject to change without notice. Final specifications may vary.