

VXW POLYCARBONATE LED BATTEN LUMINAIRE

VXW LED is a diffused integrated LED light luminaire suitable for general purpose lighting and utility lighting applications in commercial and industrial projects. The luminaires are constructed from toughened fire-resistant polycarbonate and they are ideal for installation in warehouses, factories, storerooms, underground tunnels, exterior locations etc.

ELECTRICAL PARAMETERS

Input Voltage:	220-240VAC
Rated Power:	20W / 40W / 48W
LED Driver Classification:	Integral, Constant Current
Light Source Classification:	Industrialight SMD2835 LED

MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK09
IP Protection Rating:	IP65
Body Profile Dimensions:	130x88mm
Construction Material:	Toughened Polycarbonate
Standard Colour/Finish:	White
Recommended Ambient Temp:	-15°C - 55°C



**DIMMING
OPTIONAL**

CONFIGURATION OPTIONS

- Emergency lighting version available by request
- 24VDC version available by special request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	139lm/W
CCT Colour Temperature:	3000K/4000K/6000K
Colour Rendering (Ra):	>80Ra
Beam Angle/Viewing Angle:	120°

**CONFIGURATION OPTIONS**

This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.




CASAMBI

COMPLIANCE & CERTIFICATION

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70


**ORDERING INFORMATION**

Model Number:	VXW
Switchable CCT:	3000K/4000K/6000K
Nominal Length:	655mm / 1265mm
Specify Wattage:	20W / 40W / 48W
Emergency Version:	Optional AS2293 2HR Emergency
Control Option:	Non-Dimmable / DALI / 1-10V

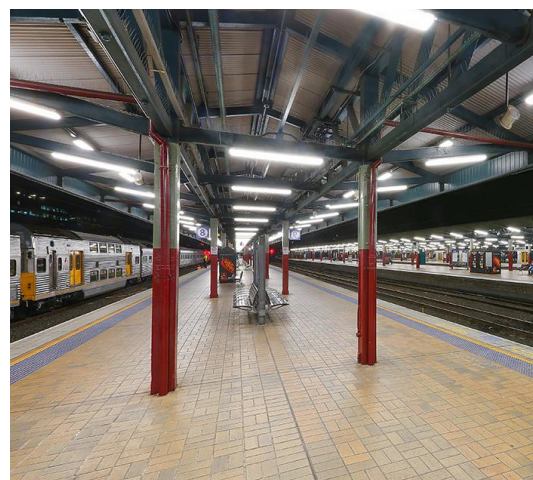

All product details are subject to change without notice. Final specifications may vary.

DIMENSIONS

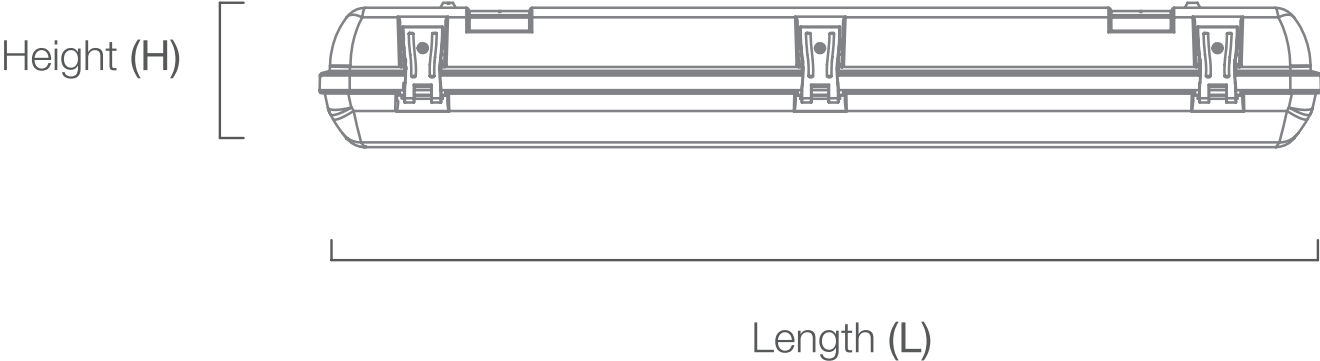

L	H	W
655	88	130
1265	88	130

Unit = mm

All product details are subject to change without notice. Final specifications may vary.