



**W3370 IP65 LED WALL LUMINAIRE**

W3370 is a commercial grade wall light with solid extruded body, and powdercoated. Corrosion resistant marine grade finish makes the product good for use in all exterior locations. The clear polycarbonate base allows for subtle indirect illumination to filter through the edge.

**ELECTRICAL PARAMETERS**

Input Voltage:	90-265VAC	 <b>DIMMING OPTIONAL</b>
Power Consumption:	10W	
LED Driver Classification:	Constant Current	
Light Source Classification:	Osram SMD3030 LED	


**MECHANICAL SPECIFICATIONS**

Minimum IK Rating:	IK10	
IP Protection Rating:	IP65	
Overall Length	230mm	
Body Height:	80mm	
Overall Projection From Wall:	33mm	
Construction Material:	Aluminium	
Standard Colour/Finish:	Black / White / Custom	
Recommended Ambient Temp:	-15°C - 55°C	

**CONFIGURATION OPTIONS**

- Non standard colours available by special request
- Remote mounted DALI dimmable LED driver available
- Also available in Smaller size option (175x83x64mm)

**PHOTOMETRIC INFORMATION**

Typical Lumen Efficacy:	90lm/W	
CCT Colour Temperature:	3000K / 4000K / 6000K / RGBW	
Colour Rendering (Ra):	>85Ra	
Beam Angle/Viewing Angle:	100°	

**CONTROL OPTIONS**


W3370 can be customised or configured according to the needs of your project. Remote mounted LED driver is available option with control protocols including DALI, Casambi, Wireless, 1-10V, analogue dimming, phase dimming.

**COMPLIANCE & CERTIFICATION**

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	<b>W3370</b>
Specify LED CCT:	<b>3000K / 4000K / 6000K / RGBW</b>
Specify Finish/Colour:	<b>Black / White / Custom</b>
Input Voltage Option:	<b>240VAC / 24VDC</b>
Dimmable Option:	<b>Non Dimmable / DALI / Casambi</b>

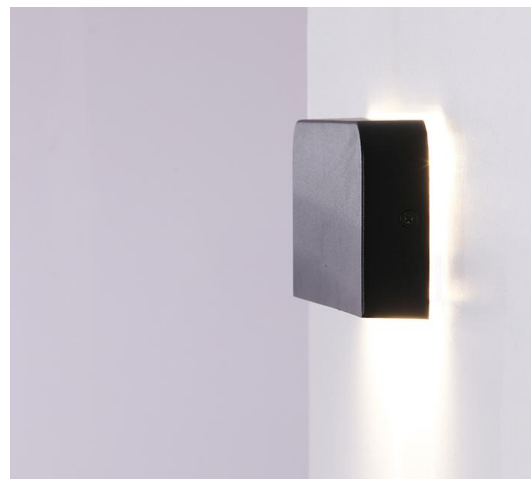

All product details are subject to change without notice. Final specifications may vary.