

W6360 IP65 LED WALL LUMINAIRE


W6360 is a commercial grade wall light with solid extruded body, and powdercoated. Corrosion resistant marine grade finish makes the product good for use in all exterior locations. Tempered glass visor and integrated LED control gear. Available in up and down or down only variants with various other custom lighting options.

ELECTRICAL PARAMETERS

Input Voltage:	100-240VAC
Power Consumption:	13W
LED Driver Classification:	Constant Current
Light Source Classification:	Osram SMD3030 LED

**MECHANICAL SPECIFICATIONS**

Minimum IK Rating:	IK10
IP Protection Rating:	IP65
Overall Length	248mm
Body Width at Base:	70mm
Projection From Wall:	115mm
Construction Material:	Aluminium
Standard Colour/Finish:	Black / White / Custom
Recommended Ambient Temp:	-15°C - 55°C

**CONFIGURATION OPTIONS**

- Non standard colours available by special request
- Remote mounted DALI dimmable LED driver available
- Also available in Smaller size option (175x83x64mm)

**PHOTOMETRIC INFORMATION**

Typical Lumen Efficacy:	90lm/W
CCT Colour Temperature:	3000K / 4000K / 6000K / RGBW
Colour Rendering (Ra):	>85Ra
Beam Angle/Viewing Angle:	100°

CONTROL OPTIONS


W6360 can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

COMPLIANCE & CERTIFICATION**CASAMBI**

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	W6360
Specify LED CCT:	3000K / 4000K / 6000K / RGBW
Specify Finish/Colour:	Black / White / Custom
Input Voltage Option:	240VAC / 24VDC
Dimmable Option:	Non Dimmable / DALI / Casambi

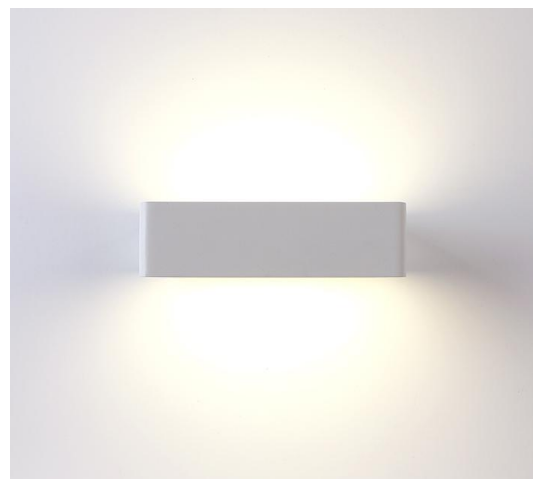

All product details are subject to change without notice. Final specifications may vary.


toll-free: **1300 295 367**email: **mail@industrialight.com.au**

sales reps:

mobile: **0488 839 917**mobile: **0488 844 503**

DIMENSIONS

LENGTH	A	248mm
PROJECTION	B	115mm
BASE WIDTH	C	70mm

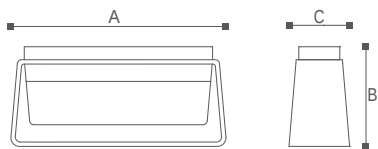

CONFIGURATION OPTIONS

- Non standard colours available by special request
- Remote mounted DALI dimmable LED driver available
- Also available in Smaller size option (175x83x64mm)

OPTIONAL CONFIGURATIONS BY REQUEST:



CASAMBI

VERTICAL OR HORIZONTAL MOUNTING

