

W7140 ECLIPSE ADJUSTABLE LED WALL LUMINAIRE

Eclipse is an adjustable wall luminaire that has a unique swivel head that can be positioned to vary the illumination effect. Suitable for indoor and outdoor lighting applications in commercial and domestic projects. Features high quality SMD integrated LED and LED Driver which is integrated.

ELECTRICAL PARAMETERS


Input Voltage:	220-240VAC
Power Consumption:	8W
LED Driver Classification:	Constant Current
Light Source Classification:	Epistar SMD LED

**MECHANICAL SPECIFICATIONS**

Minimum IK Rating:	IK10
IP Protection Rating:	IP65
Overall Height:	240mm When Extended
Dimensions:	140x60mm
Overall Projection From Wall:	60mm
Construction Material:	Aluminium & Polycarbonate
Standard Colour/Finish:	Black / White / Silver / Custom
Recommended Ambient Temp:	-15°C - 55°C

CONFIGURATION OPTIONS

- Non standard colours available by special request
- Remote mounted DALI LED driver available
- Square body available by special request

**PHOTOMETRIC INFORMATION**

Typical Lumen Efficacy:	100lm/w
CCT Colour Temperature:	3000K / 4000K / 6000K / RGBW
Colour Rendering (Ra):	>85Ra
Beam Angle/Viewing Angle:	10° / 30° / 60°

**CONTROL OPTIONS**


This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

COMPLIANCE & CERTIFICATION

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**CASAMBI****ORDERING INFORMATION**

Model Number:	W7140
Specify LED CCT:	3000K / 4000K / 6000K / RGBW
Specify Finish/Colour:	Black / White / Custom
Input Voltage Option:	240VAC / 12VDC / 24VDC
Dimmable Option:	Non Dimmable / DALI / Casambi

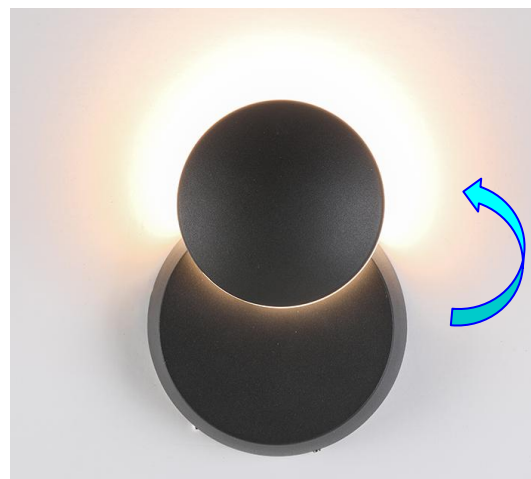

All product details are subject to change without notice. Final specifications may vary.