

WDL245 EXTERIOR WALL LUMINAIRE - IP65

WDL245 is a high-performance commercial LED wall light designed for exterior applications. Featuring an up-and-down lighting design, it enhances building facades, columns, and architectural elements with a modern touch. Built for durability, it delivers efficient illumination while complementing contemporary exteriors. Ideal for commercial spaces seeking both functionality and aesthetic appeal.

ELECTRICAL PARAMETERS

Input Voltage:	100-240VAC
Power Consumption:	28W / 36W / 52W
LED Driver Classification:	Integral Constant Current
Light Source Classification:	CREE CXA COB

MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK09
IP Protection Rating:	IP65
Profile Dimensions:	125mm Dia x 245mm (height)
Construction Material:	Extruded Aluminum
Standard Colour/Finish:	Black / White / Silver / Custom
Recommended Ambient Temp:	-20°C - 45°C

**CONFIGURATION OPTIONS**

- Available in down only version by request (WDL204)
- Non standard colours available by special request
- DALI dimmable LED driver available by request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	105lm/W
CCT Colour Temperature:	3000K / 4000K / 5000K
Colour Rendering (Ra):	>85Ra
Illumination Configuration:	Direct-Indirect / Direct Only
Lens Beam Angle Optic:	2 x 12° / 2 x 36°

CONTROL OPTIONS

WDL245 can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.


COMPLIANCE & CERTIFICATION


- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**CASAMBI****ORDERING INFORMATION**

Model Number:	WDL245
Specify LED CCT:	3000K / 4000K / 5000K
Specify Lens Angle:	2 x 12° / 2 x 36°
Specify Finish/Colour:	Black / White / Matt Silver / Custom
Specify Wattage:	2x14W / 2x18W / 2x36W
Control Option:	Non Dim / DALI-2 / Wireless Control
Configuration:	Up & Down (Direct-Indirect)

All product details are subject to change without notice. Final specifications may vary.

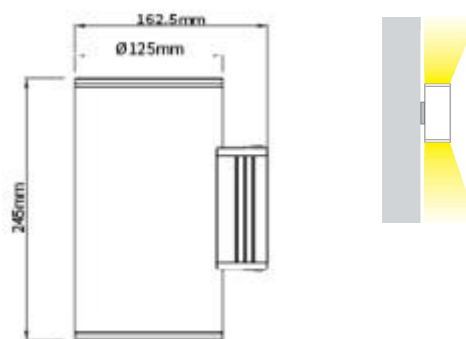

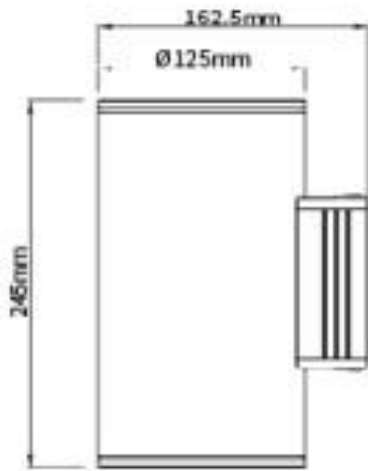WDL245 UP & DOWN CONFIGURATION**WDL204 DOWN CONFIGURATION**