

WK800 INDUSTRIAL LED WORK LIGHT AREA FLOODLIGHT

WK800 is a collapsible LED work light designed for 360-degree area illumination, featuring an optional tripod stand for versatile positioning. This durable, portable lighting solution is perfect for illuminating work sites and large areas, providing exceptional brightness and coverage to meet the demands of any task. Can be easily transported when folded away and has optional carry case.

ELECTRICAL PARAMETERS

Input Voltage:	100-277VAC
Power Consumption:	80W / 120W / 220W
LED Driver Classification:	Integrated
Light Source Classification:	SMD LED Core

MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IKx
IP Protection Rating:	IP54
Construction:	Flexible Opalescent Fabric
Tripod (Optional)	Extendable >2mtrs
Recommended Ambient Temp:	-10 ~ +45°C



TYPICAL APPLICATIONS

- Readworks, Infrastructure Work Sites, Night Work
- Mining Sites, Construction Sites, After-Hours Inspection Work
- Emergency Services Lighting, Portable Lighting, Task Lighting
- Can be suspended, floor-standing, tripod mount, etc

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	>125lm.W
CCT Colour Temperature:	3000K / 4000K / 5000K / RGBW
Colour Rendering (Ra):	>80Ra
Beam Angle/Viewing Angle:	360°

MODEL	Power	Diameter	Height
WK800W80	80W	265mm	360mm
WK800W120	120W	265mm	560mm
WK800W220	220W	265mm	820mm

WK800-TP Tripod (Optional): 2000mm Extended Height. 5.76kg

COMPLIANCE & CERTIFICATION

- AS/NZS60598, LM79, LM80
- Service Lifespan: Exceeds 30,000hrs

ORDERING INFORMATION

WK800W80	Industrial Portable Area Work Light 80W
WK800W120	Industrial Portable Area Work Light 120W
WK800W220	Industrial Portable Area Work Light 220W
WK800-CB	Black Carry Bag Case for WK800
WK800-TP	Extendable Tripod Stand
WK800-HK	350mm Hanging Strap with Buckle



All product details are subject to change without notice. Final specifications may vary.



toll-free: 1300 295 367



email: mail@industrialight.com.au


sales reps:



mobile: 0488 839 917



mobile: 0488 844 503

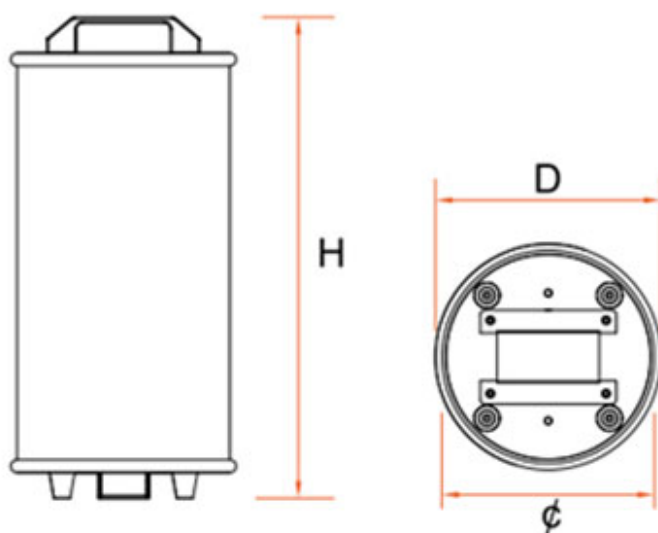

Model. 80W
H 360mm
D 265mm
Ø 250mm

Model 100W
H 560mm
D 265mm
Ø 250mm

Model 120W
H 820mm
D 265mm
Ø 250mm