

WK955 INDUSTRIAL LINKABLE LED WORK LIGHTS

WK955 series comprises robust, linkable LED work lights, engineered for a wide range of applications including work sites, portable tasks, tunnel lighting, underground mines, and specialized lighting needs. This versatile series ensures consistent, powerful illumination across diverse environments, offering scalability and reliability for the most demanding conditions.

ELECTRICAL PARAMETERS

Input Voltage:	100-277VAC or 24VDC
Power Consumption:	20W Per Module
LED Driver Classification:	Integral
Light Source Classification:	Constant Current SMD LED



MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK10
IP Protection Rating:	IP65
Total Span Length (extended):	15.7mtr (5x20W / 31.3mtr (10x20W)
Construction Material:	Alloy + Toughened Polycarbonate
Standard Colour/Finish:	Signal Orange + White
Recommended Ambient Temp:	-25 ~ +50°C




CONFIGURATION OPTIONS


- Available in connected sets of 5x20W or 10x20W
- Available with 3 Pin AU/NZS Flex & Plug by special request
- Up to 2 sets may be interconnected together in line

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	>115lm/W
CCT Colour Temperature:	2700K / 3000K / 4000K / 6500K
Colour Rendering (Ra):	Wattage: 20W±5% Per Module
Beam Angle/Viewing Angle:	120°

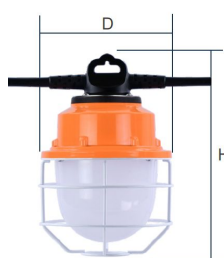

MODEL	H	D	C
WK955	188mm	120mm	3000mm

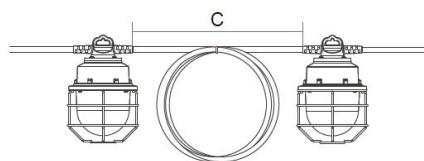

COMPLIANCE & CERTIFICATION

- IEC60598 - 100-277VAC 50.60Hz
- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70



CASAMBI

ORDERING INFORMATION



Model Number:	WK955
Configuration:	5x20W (15mtr Span
Specify LED CCT:	3000K / 4000K / 5000K / 6500K
Optional CCT By Request:	2700K or RGBW
Specify Body Colour:	Signal Orange / Black / Custom
Specify Voltage Config:	100-277VAC / 24VDC
Plug Options:	AU/NZS Flex & Plug (optional)

All product details are subject to change without notice. Final specifications may vary.





FLEXIBLE MOUNTING OPTIONS

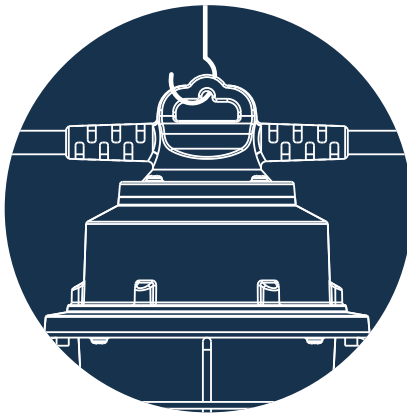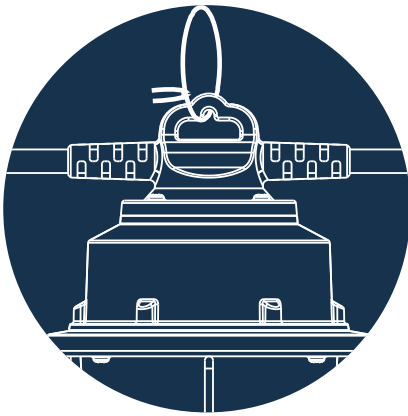



COLOURED OUTPUT OPTIONS BY SPECIAL REQUEST

