

W2000L SERIES LED WALL PACK LUMINAIRES

WL Series is a wall mounted 'Wall Pack' LED light luminaire suitable for general purpose lighting and security lighting applications in commercial and industrial projects. Industrialight Wall pack fittings incorporate high efficiency XTE LED light source and integrated constant current LED Driver. Typical applications include exterior lighting for warehouses, commercial buildings, industrial sites chemical plants, factories etc.

ELECTRICAL PARAMETERS

Input Voltage:	90-265VAC
Power Consumption:	40W/60W/80W/100W/120W/150W
LED Driver Classification:	Integral, Constant Current
Light Source Classification:	CREE XT-E High Power LED

MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK09
IP Protection Rating:	IP65
Nominal Dimensions:	366x226x196mm
Construction Material:	Toughened Polycarbonate
Standard Colour/Finish:	Black / White / Silver
Recommended Ambient Temp:	-20°C - 45°C



CONFIGURATION OPTIONS

- Available in ceiling-mount or wall-mount options
- Optional photoelectric dawn/dusk sensor (PE Cell)

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	90lm/W
CCT Colour Temperature:	3000K / 4000K / 6500K
Colour Rendering (Ra):	>85Ra
Beam Angle/Viewing Angle:	100°



CONTROL OPTIONS

This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.




COMPLIANCE & CERTIFICATION

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70



ORDERING INFORMATION

Model Number:	WL2 - LED Wall Pack Series
Specify LED CCT:	3000K / 4000K / 6500K
Specify Wattage:	40W/60W/80W/100W/120W/150W
Specify Finish/Colour:	Black / Polycarbonate
Optional PE Sensor:	PE (Factory fitted by request)
Control Option:	Non-Dimmable / DALI / Phase Dim

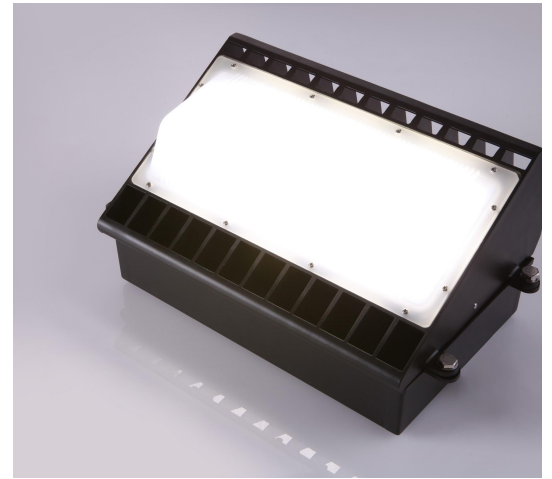

All product details are subject to change without notice. Final specifications may vary.