

WLR76 RECESSED EXTERIOR LED BRICK LIGHT

WLR76 presents a premium stainless-steel recessed wall luminaire for exterior use and harsh coastal locations. This fixture features integrated Osram LEDs with dedicated driver, delivering reliable architectural lighting performance and energy efficiency. Perfect for guiding light along pathways, corridors, stairwells, plazas, campuses, waterfronts, and other functional zones. Brick-style faceplate with open face design. Optional grille and protective grille options by special request.

SPECIFICATIONS

Input Voltage:	100-240VAC
Max Power Consumption:	6W
Trim Dimensions:	240x76mm (other sizes by request)
Overall Fixture Depth:	95mm
Overall Depth (Mounting Box):	104mm
LED Classification:	Osram Duris-E
Colour/Finish:	316 Stainless Steel Trim
Typical Light Source Efficacy:	100lm/W
Beam Angle Options:	100°
Included Accessories:	Plastic Mounting Box
Recommended Ambient Temp::	-10 ~ +40° C
IP Protection Rating:	IP65

PHOTOMETRIC INFORMATION

WLR76-6000K	 CCT: 6000K CRI: >80	
WLR76-4000K	 CCT: 4000K CRI: >80	
WLR76-3000K	 CCT: 3000K CRI: >80	
Detailed photometric report and IES files available by request		

TYPICAL APPLICATIONS

Applications include commercial and residential lighting, public spaces, pathways and passageways, stairwell lighting, retaining walls, entrances and common areas, hotels, hospitality projects etc.

CONTROL & DIMMING COMPATIBILITY

WLR76 is typically non dimmable configuration. Optional dimmable configurations including Phase Dim, DALI, 1-10V, DMX512. Some options may require remote mounted control gear. Please contact us for options and availability.

ORDERING INFORMATION


WLR76-6000K	Recessed Brick Light Silver inc Mounting Box 6000K
WLR76-4000K	Recessed Brick Light Silver inc Mounting Box 4000K
WLR76-3000K	Recessed Brick Light Silver inc Mounting Box 3000K
WLR76BK-6000K	Recessed Brick Light Black inc Mounting Box 6000K
WLR76BK-4000K	Recessed Brick Light Black inc Mounting Box 4000K
WLR76BK-3000K	Recessed Brick Light Black inc Mounting Box 3000K

CUSTOMISATION OPTIONS

Standard powdercoat finishes including Black, White, Silver
WLR76 features open fascia from pane. Grille and other facias by special request
Fixture colour can be refinished by special request
RGB and RGBW, CCT Tunable LED Options by request
Remote Mounted DALI or DMX512 control options available
Wireless Casambi Control Option also available
**Custom options may be subject to minimum order quantities




CCT TUNABLE
& DIMMABLE

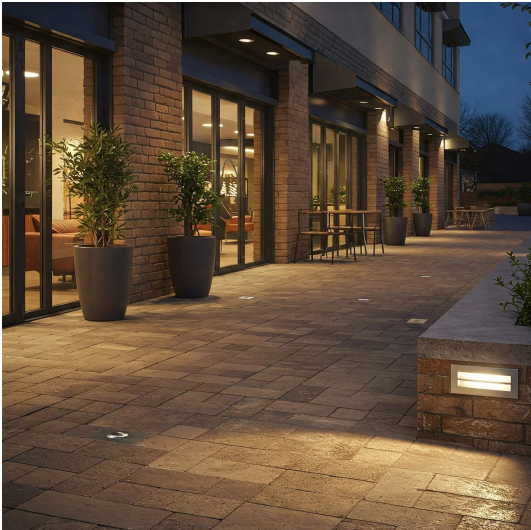


All product specifications are subject to change without notice. Industrallight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details prior to ordering.


OPTIONAL SIZES AVAILABLE

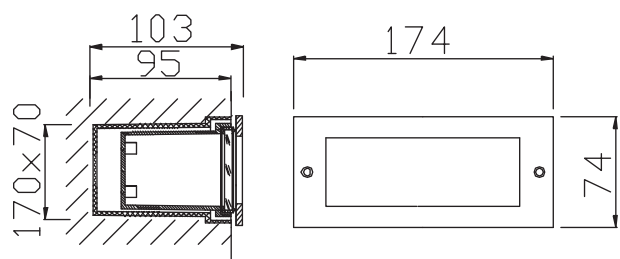

WLR76-174MM

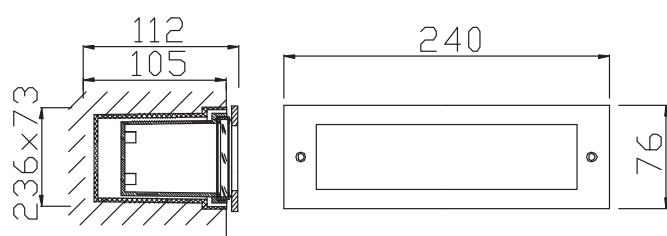

WLR76-240MM

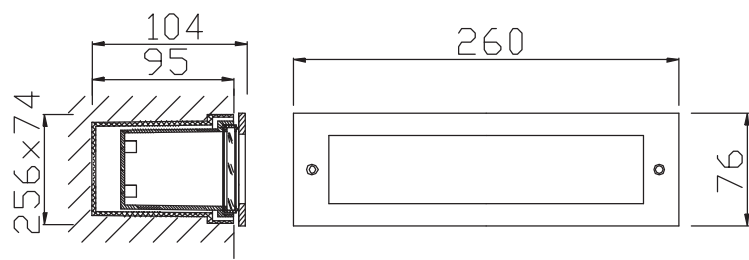

WLR76-260MM