

WPK400 ADJUSTABLE WALL PACK LUMINAIRE


WPK400 is a versatile wall pack lighting solution with variable adjustable tilt feature. The luminaire can be positioned for optimal mix of direct or indirect illumination. Toughened construction for all exterior locations and harsh environments. Typical applications commercial & industrial lighting, landscape lighting, security lighting, building facades, courtyards, floodlighting, task lighting. WPK is now available in two model sizes with selectable CCT and LED power options

ELECTRICAL PARAMETERS

Input Voltage:	120-277VAC
Power Variants:	15W 20W 30W / 40W 60W 80W
LED Driver Classification:	Integral Constant Current
Light Source Classification:	Lumileds COB

MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK10
IP Protection Rating:	IP66
Nominal Dimensions:	Refer Drawing
Colour/Finish:	Dark Bronze / Black / White / Silver
Construction Material:	Aluminium
Rec. Ambient Temp:	-10 ~ +50°C

**CONFIGURATION OPTIONS**

- Non standard fitting colours available by special request
- Can be fitted with PE automatic daylight sensor

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	130lm/W
Colour Rendering (Ra):	>80Ra
Beam Angle/Viewing Angle:	92°
CCT Colour Temperature:	3000K 4000K 5000K RGBW

CONTROL OPTIONS


WPK400 can be configured according to the needs of your project. Can be fitted with Photo-Cell (PE) sensor for automation control. Optional dimming & control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

COMPLIANCE & CERTIFICATION**CASAMBI**

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	VPK400
LED CCT:	3000K / 4000K / 5000K Selectable
Beam Angle Optic:	90° with Adjustable Aperture
Specify Finish/Colour:	Dark Bronze / Black / White / Silver
Specify Power Option:	15W-30W or 40W-80W
Control Option:	Non-Dimmable / 1-10V / PE Cell

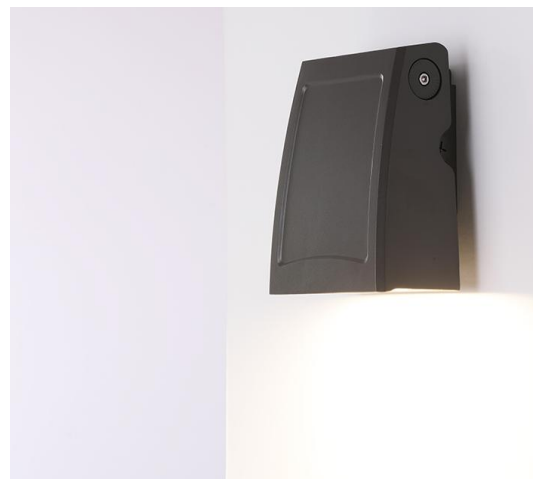


All product details are subject to change without notice. Final specifications may vary.


toll-free: **1300 295 367**email: **mail@industrialight.com.au**

sales reps:

mobile: **0488 839 917**mobile: **0488 844 503**




97.6mm



205.3mm


164.9mm

106.2mm




136.7mm

12W/20W/35W




123.5mm



276.5mm


216mm

138.5mm




192.5mm

50W/75W




146.9mm



326.5mm

267mm

189.5mm





236.5mm

100W/120W

WPK400 30W 4000K Configuration Shown

WPK400

TYPICAL PHOTOMETRICS

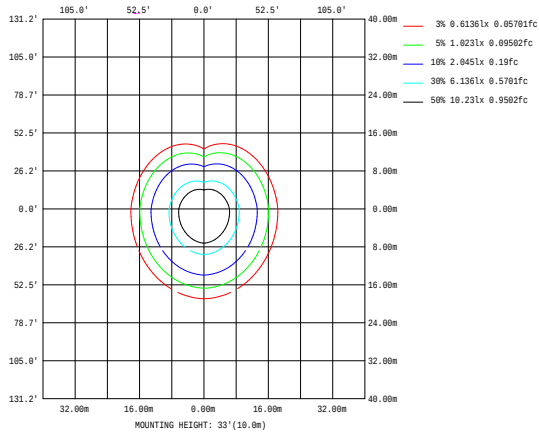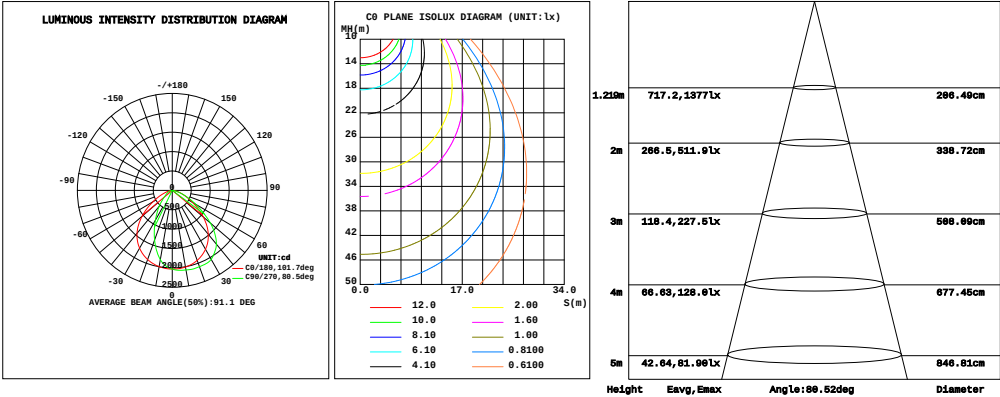

WPK400 80W 4000K Configuration Shown

