

WPK550 LED WALL PACK LUMINAIRE

WPK550 is a professional wall mounted luminaire for commercial and industrial projects. The body is manufactured from toughened materials with vandal resistant polycarbonate visor. WPK550 is ideal for general purpose lighting in courtyards, common areas, carparks, security lighting, commercial sites.

ELECTRICAL PARAMETERS

Input Voltage:	120-277VAC
Power Consumption:	28W-120W
LED Driver Classification:	Integral High Efficiency
Light Source Classification:	Lumileds

MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK10
IP Protection Rating:	IP65
Nominal Dimensions:	Refer to Drawing
Overall Depth From Wall:	155mm / 199mm
Construction Material:	Aluminium & Polycarbonate
Standard Colour/Finish:	Black
Recommended Ambient Temp:	-30°C - 45°C

**CONFIGURATION OPTIONS**

- Optional 200-480VAC version by special request
- DALI dimmable LED driver available by request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	110lm/W
CCT Colour Temperature:	3000K / 4000K / 6500K
Colour Rendering (Ra):	>80Ra
Beam Angle/Viewing Angle:	130°

**CONTROL OPTIONS**

This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

COMPLIANCE & CERTIFICATION**CASAMBI**

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**ORDERING INFORMATION**

Model Number:	WPK550
Specify LED CCT:	3000K / 4000K / 6500K
Wattage Configuration:	28W-70W / 48W-120W (Selectable)
Finish / Colour:	Black / White / Silver / Custom
Input Voltage Option:	100-277VAC / 24VDC
Control Option:	Non-Dim / DALI / Phase Dim / Casambi
Optional Sensor:	PE Photocell (Auto-Dusk Sensor)




All product details are subject to change without notice. Final specifications may vary.

toll-free: **1300 295 367**email: **mail@industrialight.com.au**


sales reps:

mobile: **0488 839 917**mobile: **0488 844 503**

28W-70W

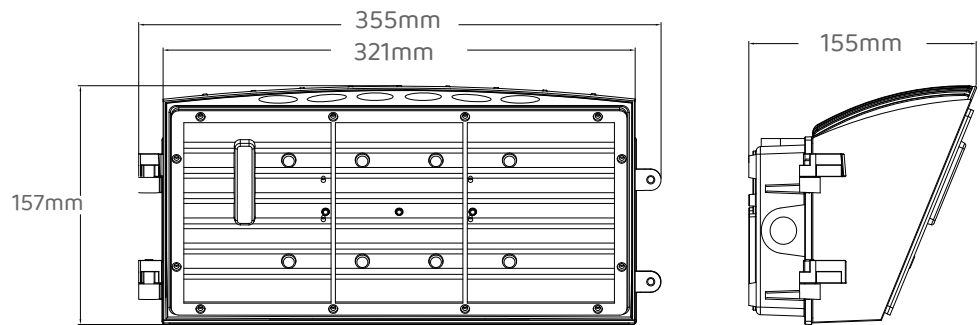


48W-120W

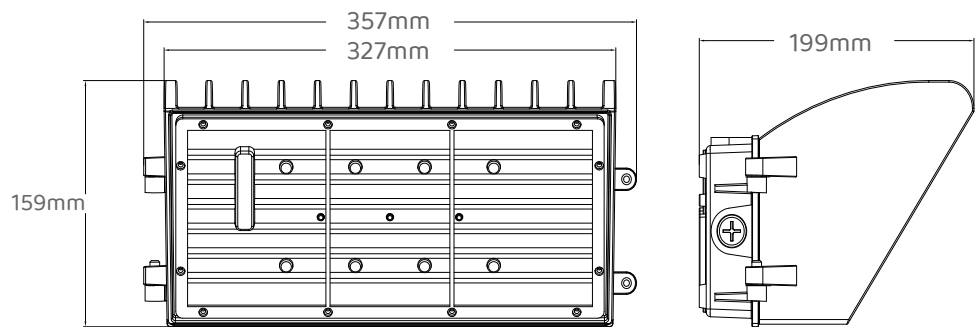


TYPICAL PHOTOMETRICS


28W 4000K

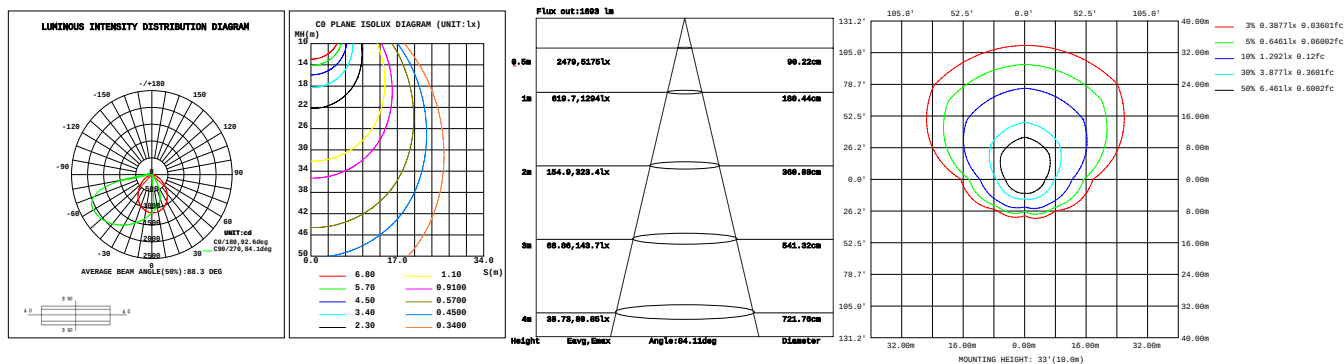

42W 4000K

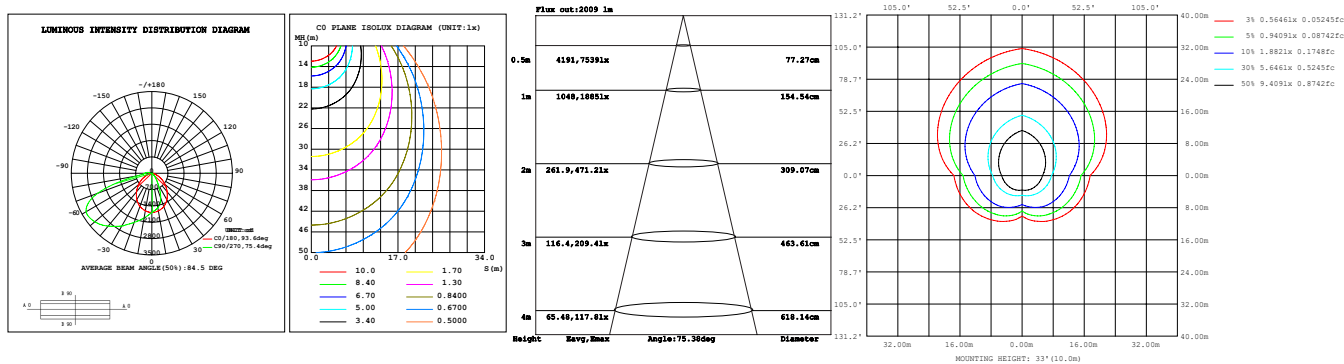


56W 4000K

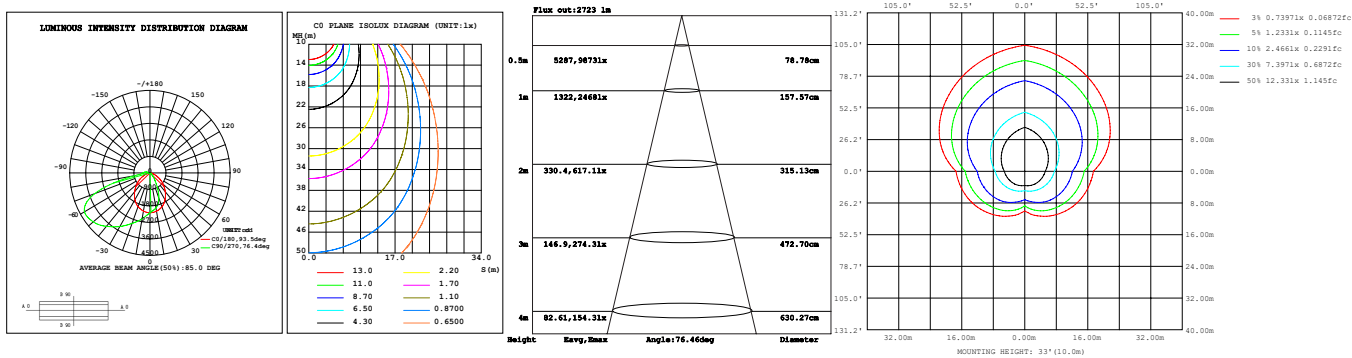


WPK550

TYPICAL PHOTOMETRICS


70W 4000K

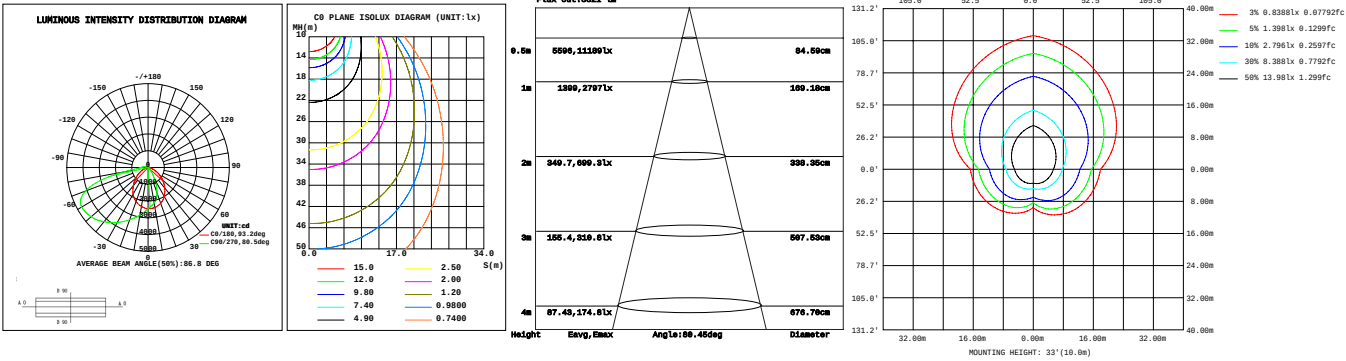

48W 4000K

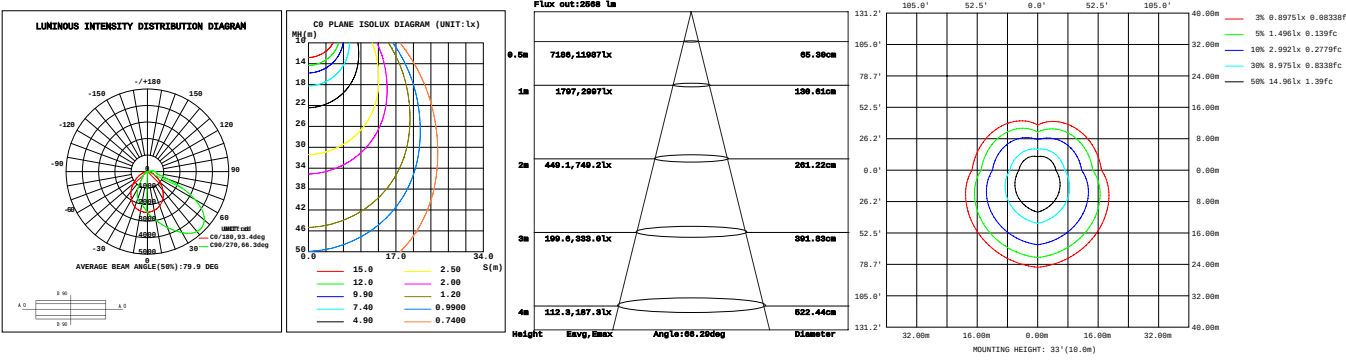


72W 4000K

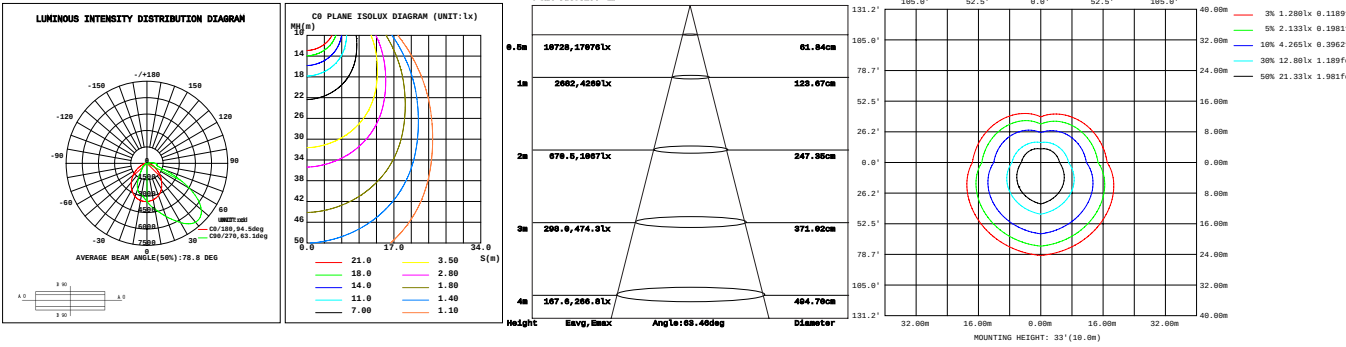

WPK550

TYPICAL PHOTOMETRICS

96W 4000K

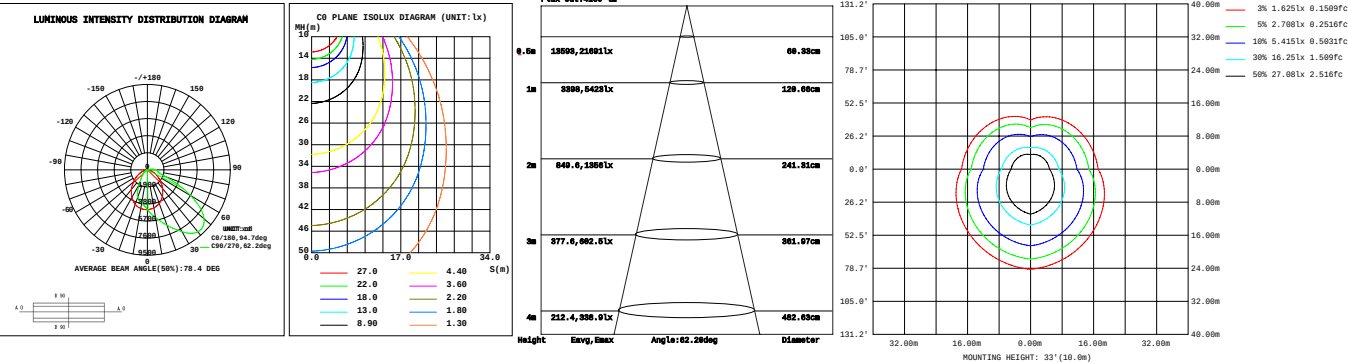

120W 4000K

