

XL2122 LINEAR WALL LUMINAIRE -DIRECT/INDIRECT

XL2122 is a streamlined linear wall light designed specifically for above-bed use in retirement homes, hospitals, and clinical settings. Offering optimal illumination, it ensures patient comfort and is both practical and durable for healthcare environments. Available in several modular lengths, XL2122 can be configured for independent switching or dimming control of the direct and indirect components.

ELECTRICAL PARAMETERS

Input Voltage:	100-240VAC
Power Consumption:	12W / 18W / 25W / 40W
LED Driver Classification:	Integral Constant Current
Light Source Classification:	SMD2835

MECHANICAL SPECIFICATIONS

Minimum IK Rating:	IK08
IP Protection Rating:	IP40
Profile Dimensions:	88x47mm
Construction Material:	Die Cast Aluminum
Standard Colour/Finish:	Black / White / Custom
Recommended Ambient Temp:	-20°C - 45°C

**CONFIGURATION OPTIONS**

- Custom sizes available by request
- Non standard colours available by special request
- Integral DALI dimmable LED driver available by request

PHOTOMETRIC INFORMATION

Typical Lumen Efficacy:	90lm/W
CCT Colour Temperature:	3000K / 4000K / 5000K
Colour Rendering (Ra):	>85Ra
Illumination Configuration	Direct-Indirect / Direct Only

CONTROL OPTIONS


This product can be customised or configured according to the needs of your project. Dimming and control options are available by special request. Control protocols include DALI, Casambi, Wireless, 1-10V, analogue dimming.

COMPLIANCE & CERTIFICATION

- IESNA2002
- AS/NZS60598, LM79, LM80
- Lifespan: Exceeds 50,000hrs @ L70

**CASAMBI****ORDERING INFORMATION**

Model Number:	XL2122
Specify LED CCT:	3000K / 4000K / 5000K
Specify Length:	614mm / 914mm / 1204mm
Specify Finish/Colour:	Black / White / Custom
Specify Wattage:	12W-40W
Control Option:	Non Dim / DALI
Configuration:	Direct Only / Direct-Indirect


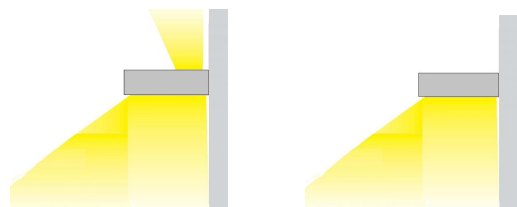


All product details are subject to change without notice. Final specifications may vary.

toll-free: **1300 295 367**email: mail@industrialight.com.au

sales reps:

mobile: **0488 839 917**mobile: **0488 844 503**

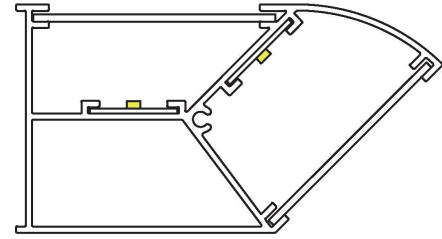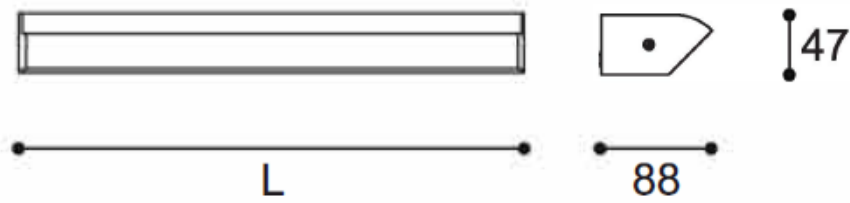

MODEL	DIMENSIONS L x W x H
XL2122-L600	614 x 88 x 47mm
XL2122-L900	914 x 88 x 47mm
XL2122-L1200	1204 x 88 x 47mm